


55-Inch Digital Drive-Thru Menu Board

IP66 outdoor display | 3000 nits | Single, dual and triple configurations

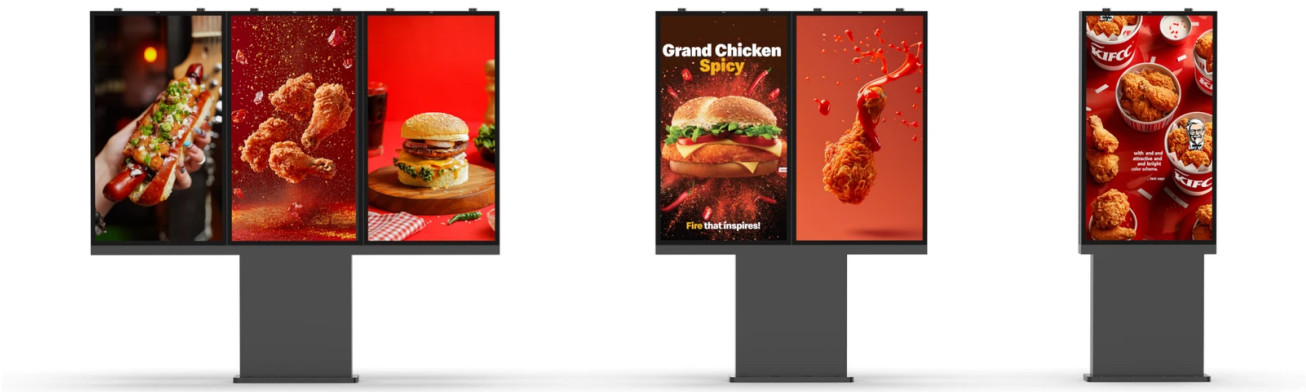

Display and enclosure

Screen size	55 inches per screen; portrait installation
Resolution	3840 x 2160 pixels (UHD)
Brightness	3000 cd/m2 (nits)
Contrast ratio	1200:1
Viewing angle	178 degrees horizontal / vertical
Response time	6 ms
Backlight life	50,000 hours
Operation	24/7
Ingress protection	IP66
Enclosure	Black aluminum housing with glass front
Brightness / thermal control	Light sensor, fan control and overheating protection

55-Inch Digital Drive-Thru Menu Board

System, electrical and installation specifications

Operating system	Android 11
Processor	RK3568, quad-core, 2.0 GHz
Memory / storage	2 GB RAM / 32 GB eMMC
Connections	2 x USB, 1 x HDMI input, 1 x RJ45
Network	Wi-Fi / LAN; optional 3G/4G
Audio	Built-in speaker; Bluetooth speaker support
Power supply	AC 100-240 V, 50/60 Hz
Maximum system power	460 W for the complete system
Operating temperature	-45 to +65 degrees C
Storage temperature	-50 to +70 degrees C
Humidity	10-80%
Screen-body thickness	148 mm (not the complete pedestal depth)

Configuration dimensions

Single screen (W x H)	732.8 x 1999.6 mm
Dual screen (W x H)	1465.6 x 1999.6 mm
Triple screen (W x H)	2198.4 x 1999.6 mm

Each configuration uses 55-inch screens. Refer to the dimension drawings for the pedestal footprint and mounting details. The installation manual illustrates the dual-screen assembly. Confirm the selected configuration before installation.